

## FSHK 200/300/500





### Ex-electrical heater 200/300/500 Watt

Ribbed heater, made of black anodized aluminium 90 mm high, with resetable temperature controller, Integrated Temperature interruption warning < 5°C due to potential-free contact.

Rated output:	200/300/500 Watt
Working voltage:	250 V, 50/60 Hz (120 V, 50/60 Hz possible)
Connection cable:	1m silicon cable, 5 x 1 mm <sup>2</sup>
Surroundings temperature:	-50°C to +80°C
Protection degree:	IP 68
Weight:	apprx. 3 kg

<b>GOST-R</b> licence:	N° POCC DE ГБ05 B03310
EC Type-examination certificate no.:	PTB 02 <b>ATEX</b> 2041 X
Explosion-proof according to 94/9/EG:	⊕ II 2 G Ex mb IIC T3 / T4, ⊕ II 2D Ex tD A21 IP68 T130°C / T195°C

⚠ **The heaters can only be operated in combination with a temperature-switch/ –regulator. The installation in the cabinet should be in horizontal position. Vertical position is possible after consultation our technical assistance.**

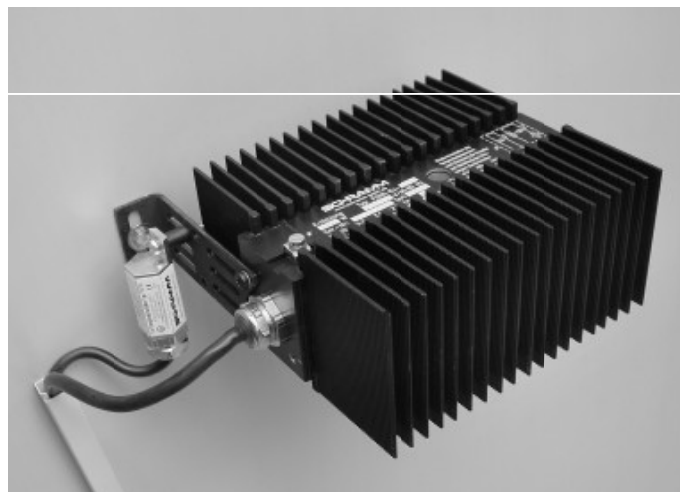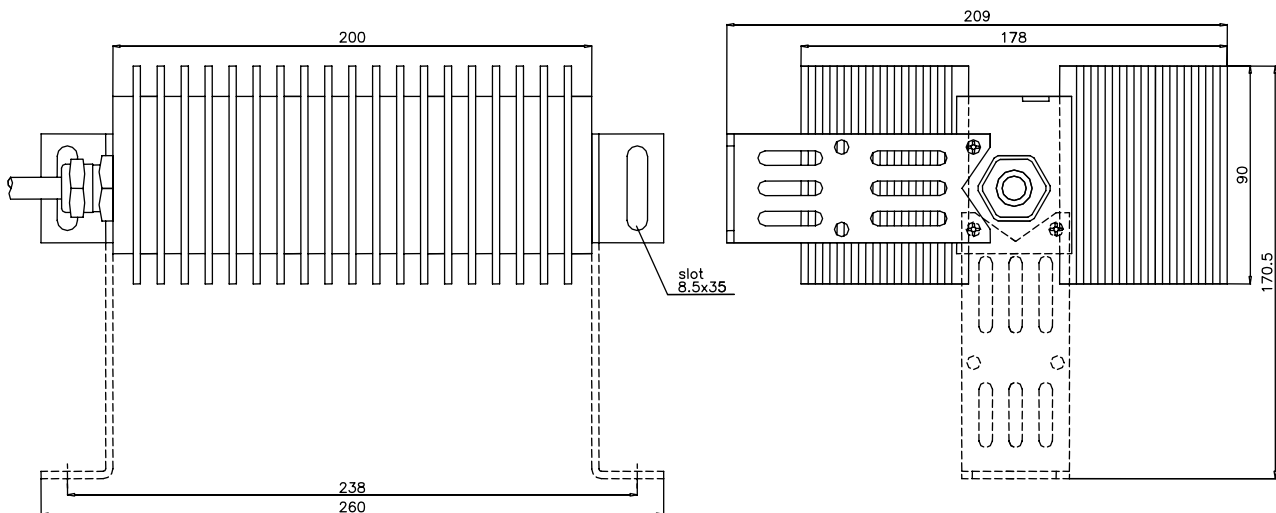

**Mounting example**